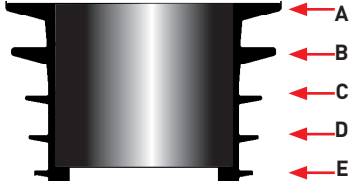


ANWENDUNGSTABELLE RÜCKSTAUDICHTUNGEN UNIVERSAL:

Sortiert nach Typ					passende Rückstaudichtung										
DN	AuØ	Inn Ø	WS	Ø 50	Ø 56	Ø 63	Ø 75	Ø 90	Ø 95	Ø 110	Ø 125	Ø 140	Ø 160		
PE-HD	63	63	57.0	3.0	50	-	-	-	-	-	-	-	-		
PE-HD	75	75	69.0	3.0	50	56	63	-	-	-	-	-	-		
PE-HD	90	90	83.0	3.5	-	56	63	75	-	-	-	-	-		
PE-HD	110	110	101.4	4.3	-	-	-	75	90	95	-	-	-		
PE-HD	125	125	115.2	4.9	-	-	-	-	-	-	110	-	-		
PE-HD	150	160	147.6	6.2	-	-	-	-	-	-	-	125	140		
PE-HD	200	200	187.6	6.2	-	-	-	-	-	-	-	-	140	160	
PVC-HT	75	75	71.2	1.9	50	56	63	-	-	-	-	-	-		
PVC-HT	110	110	104.6	2.7	-	-	-	75	90	95	-	-	-		
PVC-HT	125	125	118.8	3.1	-	-	-	-	-	-	110	-	-		
PVC-HT	150	160	152.2	3.9	-	-	-	-	-	-	-	125	140		
PVC-HT	200	200	190.7	4.9	-	-	-	-	-	-	-	-	140	160	
SML-Guss	70	78	71.0	3.5	50	56	63	-	-	-	-	-	-		
SML-Guss	80	88	81.0	3.5	-	56	63	75	-	-	-	-	-		
SML-Guss	100	110	103.0	3.5	-	-	-	75	90	95	-	-	-		
SML-Guss	125	135	127.0	4.0	-	-	-	-	-	-	110	-	-		
SML-Guss	150	160	152.0	4.0	-	-	-	-	-	-	-	125	140		
SML-Guss	200	210	200.0	5.0	-	-	-	-	-	-	-	-	-		
Eternit	70	84	70.0	7.0	50	56	63	-	-	-	-	-	-		
Eternit	80	96	80.0	8.0	-	56	63	75	-	-	-	-	-		
Eternit	100	116	100.0	8.0	-	-	-	75	-	-	-	-	-		
Eternit	125	141	125.0	8.0	-	-	-	-	-	-	110	-	-		
Eternit	150	168	150.0	9.0	-	-	-	-	-	-	-	125	140		

XXL XXL XXL
TECHNISCHE DATEN

Ø Lippe	DURCHMESSER DER DICHTLIPPEN										
	Ø 50	Ø 56	Ø 63	Ø 75	Ø 90	Ø 95	Ø 110	Ø 125	Ø 140	Ø 160	
	77	90	90	108	111	111	135	160	200	200	A
	74	90	90	108	110	110	133	160	196	196	B
	66	74	74	91	108	108	124	154	156	196	C
	64	73	73	89	106	106	122	154	156	194	D
	61	73	73	87	105	105	120	152	152	194	E

XXL XXL XXL